


Quick Release Pneumatic Hose Couplings



European Execution Double Lock Claw Couplings

Q4 Blanking Off End

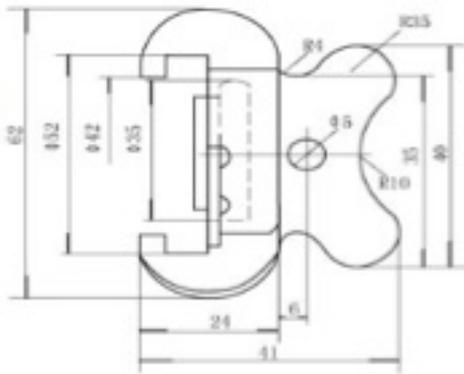

- Robust couplings of malleable iron, zinc plated and yellow passivated (free of chrome VI)
- 100% couple test and sight control
- With oil-resistant rubber ring GOER, on request with steam-resistant rubber ring GDOR (up to 200°C) against charge
- Universal coupling, world-wide used system for compressed air in construction and industry

Part No	MAX. WORKING PRESSURE	TEMP.	MATERIAL	SEAL	THREADS	NORM	MEDIUM	CLAW DISTANCE
Q4	PN 10 BAR	-40°C-+95°C	Malleable Iron	NBR	ISO 230	DIN 3491	Compressed Air	42 mm