

Food Industry - Special applications



Super Thermoclean, 40 bar

Applications

- Industrial cleaning

Sectors of Activity

- Dairy industry
- Communities
- Shopkeepers, Craftsmen
- Abattoirs
- Industrial uses

Advantages

Super material properties of Thermoclean 40 make it a high-performance, safe and reliable hose capable of meeting severe conditions :

- Exceptional temperature performance (up to 70°C under 40 bar continuously, peaks possible up to 80°C) ;
- Six highly flexible layers provide excellent handling non-staining blue outer surface is resistant to oily products and detergents ;
- Excellent kinking resistance.



Connectors

Barbed connectors with 'O' type clips (retighten the clips after first high temperature use).

Crimping is possible under certain conditions (please consult us).

Chemical Resistance

See table column B.



-10°C to +70°C




Average pressure industrial washing hose (40 bar at 70°C).

Six-layer design with double polyester fibre reinforcing.



- 1 Blue cover in flexible, non-staining, greaseproof, detergent and disinfectant resistant food grade PVC.
- 2 4 Double polyester reinforcing.
- 3 5 Intermediary layers in flexible PVC.
- 6 Inner surface in flexible grey PVC.

Marking : SUPER THERMOCLEAN 40 BAR / 70°C 2007/19/CE [year of fabrication] [batch number]

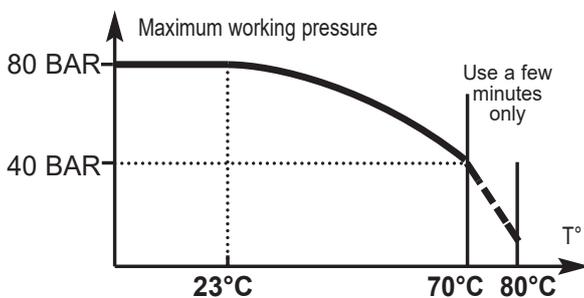

mm	mm	mm	mm	mm	g/m	20°C	70°C	20°C	70°C	mm	Blue		
											25 m	50m	100 m
12	+/- 0,6	22	+/- 0,8	5	335	240	120	80	40	84	TRI-100758	100761	100774